


Aramid Felt 5120

Expanded PTFE Membrane on Aramid Felt

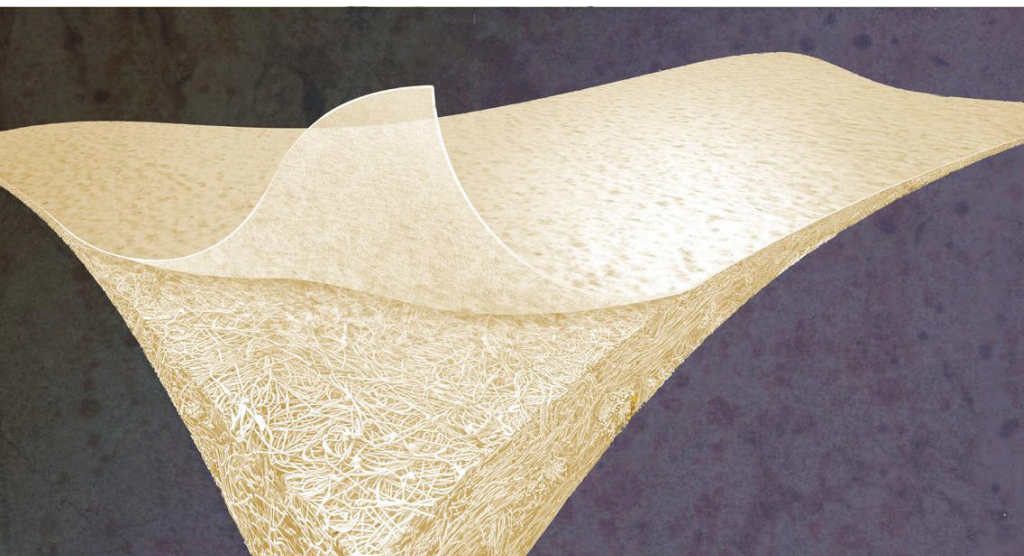

Fiber	Aramid (100% virgin fiber)
Scrim	Aramid (100% virgin fiber)
Finish (Base Fabric)	N/A
Weight (Base Fabric)	14 oz/yd ² 475 gm/m ²
Air Permeability (Average)	7.8 cfm/ft ² @ 0.5" wg 3.7 m ³ /min/m ² @ 20 mm wg
Continuous Service Temperature	400°F 205°C
Mullen Burst Strength	400 psi (minimum average) 2758 kilopascals
Breaking Strength	
Warp	120 Lbf/2" (minimum average) 532 N/5 cm
Fill	170 Lbf/2" (minimum average) 756 N/5 cm

To place an order or to learn more about PRISTYNE® Filter Media, please contact us:

By telephone

+49 (0) 89 4612 - 22 48 (Europe)

+86 21 5172 8299 (China)

+1 800 542 2434 (US)

By fax

+49 (0) 89 4612 - 23 08 (Europe)

+86 21 6247 9199 (China)

+410 506 3463 (US)

By e-mail

sales@pristyne.com

On the Web

www.pristyne.com

W.L.Gore & Associates

101 Lewisville Road

P.O. Box 917

Elkton, MD 21922

USA

All data expressed as typical values.
This specification is subject to change.
Please contact PRISTYNE® Media Group
directly to confirm current information.

FOR INDUSTRIAL USE ONLY. Not for use in food,
drug, cosmetic or medical device manufacturing,
processing, or packaging operations.

