


Polypropylene Felt 1110

Expanded PTFE Membrane on Polypropylene Felt

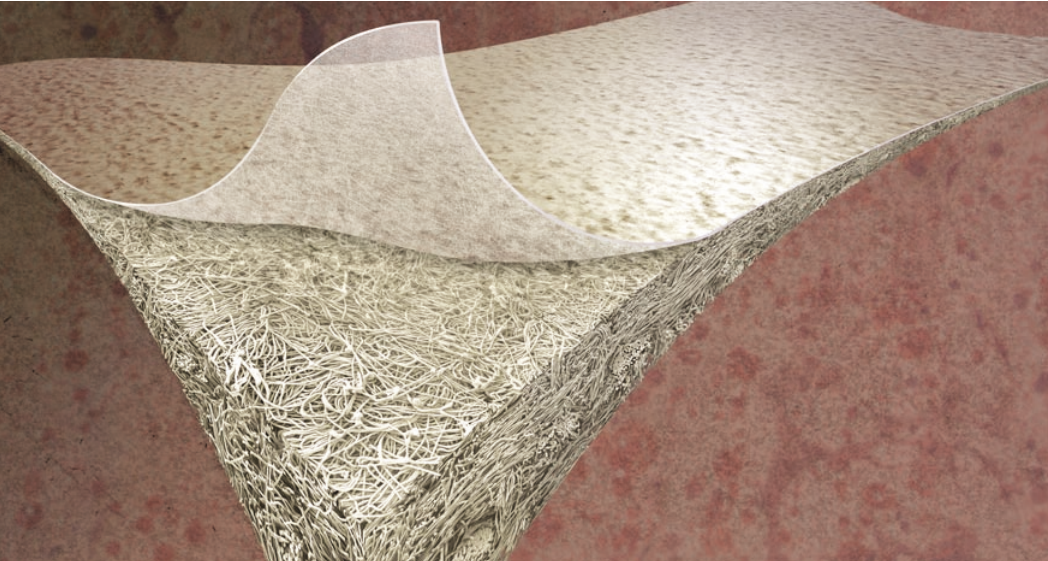

Fiber	Polypropylene
Scrim	Polypropylene Ribbon Scrim
Finish (Base Fabric)	N/A
Weight (Nominal)	12.0 oz/yd ² 407 gm/m ²
Air Permeability (Average)	8.0 cfm/ft ² @ 0.5" wg 3.8 m ³ /min/m ² @ 20 mm wg 3 micron pore size
Continuous Service Temperature	160°F 70°C
Mullen Burst Strength	200 psi (minimum average) 1379 kilopascals
Breaking Strength	
Warp	75 Lbf/2" (minimum average) 330 N/5 cm
Fill	150 Lbf/2" (minimum average) 665 N/5 cm

To place an order or to learn more about PRISTYNE® Filter Media, please contact us:

By telephone

+49 (0) 89 4612 - 22 48 (Europe)

+86 21 6247 1999 (China)

+1 800 542 2434 (US)

By fax

+49 (0) 89 4612 - 23 08 (Europe)

+86 21 6247 9199 (China)

+410 506 3463 (US)

By e-mail

sales@pristyne.com

On the Web

www.pristyne.com

W. L. Gore & Associates

101 Lewisville Road

P.O. Box 917

Elkton, MD 21922

USA

All data expressed as typical values.
This specification is subject to change.
Please contact PRISTYNE® Media Group
directly to confirm current information.

