


Woven Fiberglass with Acid-Resistant Finish 6220

Expanded PTFE Membrane on Woven Fiberglass with Acid-Resistant Finish

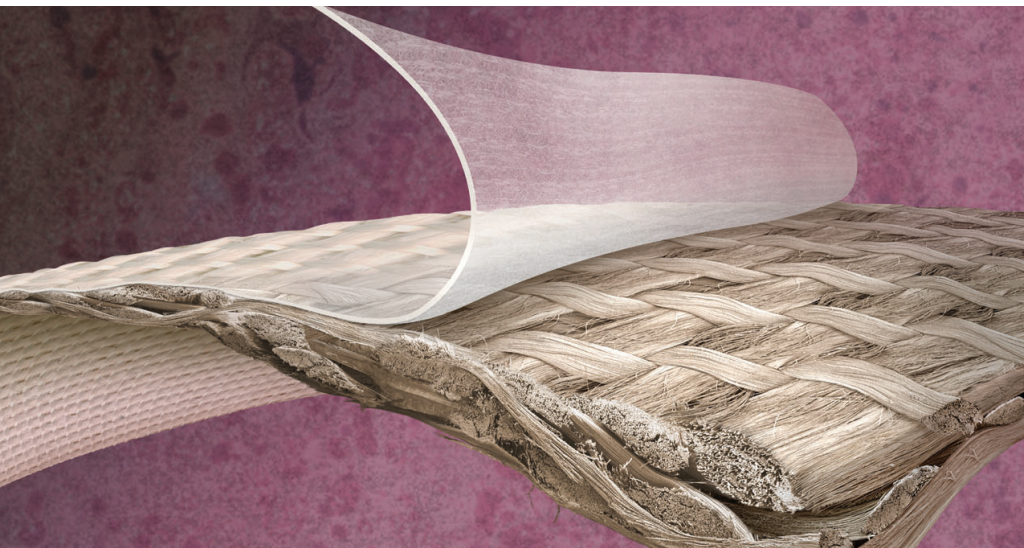

To place an order or to learn more about PRISTYNE® Filter Media, please contact us:

By telephone

+49 89 4612 - 22 48 (Europe)
 +86 21 5172 8299 (China)
 +1 800 542 2434 (US)

By fax

+49 89 4612 - 23 08 (Europe)
 +86 21 6247 9199 (China)
 +410 506 3463 (US)

By e-mail

sales@pristyne.com

On the Web

www.pristyne.com

W.L.Gore & Associates

101 Lewisville Road
 Elkton, MD 21922
 USA

All data expressed as typical values. This specification is subject to change. Please contact PRISTYNE® Media Group directly to confirm current information.

FOR INDUSTRIAL USE ONLY. Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations.

Fiber	Fiberglass
Yarn Type	
Warp	75 1/0
Fill	150 1/0 Filament & 50 1/0 Tex/Ply
Finish (Base Fabric)	Acid-Resistant
Weight (Nominal)	10 oz/yd ² 339 gm/m ²
Weave Pattern	1 x 3 Right Hand Twill
Thread Count	54 x 30 (Warp x Fill)
Air Permeability (Average)	6.5 cfm/ft ² @ 0.5" wg 3.1 (m ³ /min/m ² @ 20 mm wg)
Continuous Service Temperature	500°F 260°C
Mullen Burst Strength	600 psi 4137 kilopascals
Breaking Strength	
Warp	350 Lbf/1" modified cut strip 1557 N/2.54 cm modified cut strip
Fill	250 Lbf/1" modified cut strip 1112 N/2.54 cm modified cut strip



© 2011 W. L. Gore & Associates

GORE, PRISTYNE and designs are trademarks of W. L. Gore & Associates

