



# Gore-Shield®

GS8000 GROUNDING PADS

*Soft and Highly Conductive*

## Summary

GORE-SHIELD® GS8000 Conductive Foam is ideal for applications such as grounding pads where conformability, high conductivity, and low compressive forces are required.

GORE-SHIELD® GS8000 Conductive Foam can be supplied as die-cut parts on rolls for high-volume assembly. This material is ideal for the cellular phone, PDA, and portable computing market.

GORE-SHIELD® GS8000 Conductive Foam consists of a nickel-plated conductive polyurethane foam bonded to an adhesive package. This package contains copper foil, conductive pressure sensitive adhesive, and a PET carrier film (see Figure 1).

### APPLICATIONS


RF and static grounding for mobile phones, PDA's, portable computing, or other portable devices.

### DESIGN CONSIDERATIONS

When considering GORE-SHIELD® GS8000 Conductive Foam for a grounding pad application, it is important to understand the surfaces the pad will contact. If the pad will be adhered to the housing or cover, then surface flatness, roughness, material type, rigidity, tolerance take-up, and fastener locations must be considered.

Once the working height of the compressed pad is established, refer to Chart 1 to determine which thickness of GORESHIELD® GS8000 Conductive Foam is most suitable. Ideally, designers should strive for 50-75% compression to final stop to ensure consistent RF grounding across the face and through the grounding pad.


Gore application engineers can provide expert design assistance and rapid prototyping for your grounding pad solution needs. Please contact Gore for additional information.

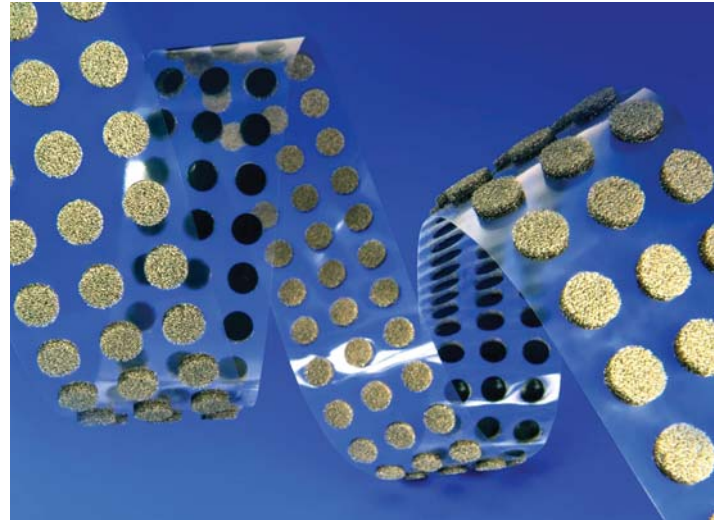

### FEATURES AND BENEFITS

- Low DC resistance
- Excellent reliability through Accelerated Life Testing (ALT)
- Excellent gap tolerance take-up
- Conformable and highly compressive with low force
- Compensates for materials with large tolerances

**FIGURE 1**

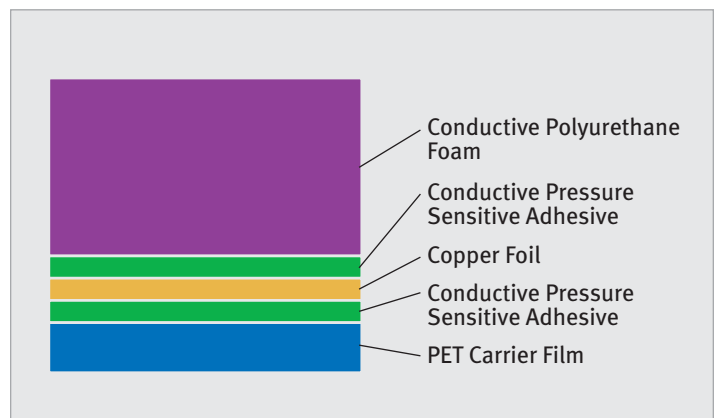




# Gore-Shield®

GS8000 GROUNDING PADS

### CHART 1 – GS8000 CLOSURE FORCE/SHIELDING EFFECTIVE VERSUS % COMPRESSION

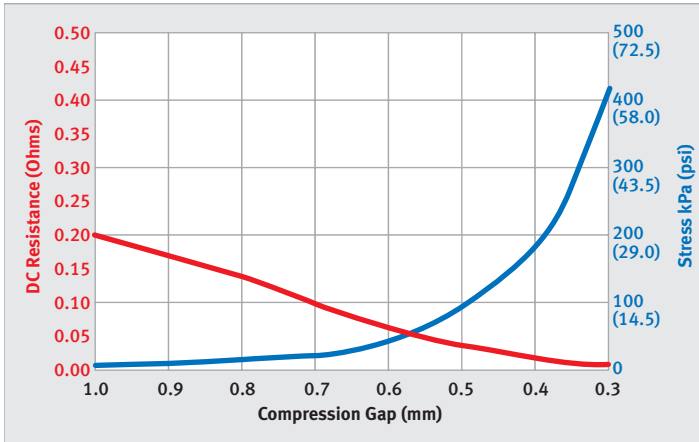

Part List	Thickness	
GS8000-063	1.6 mm (0.063 in.)	Measured optically
GS8000-126	3.2 mm (0.126 in.)	Measured optically

Die-Cut Part Thickness		
GS8000-063	1.0 mm (0.039 in.)	Measured optically
GS8000-126	2.3 mm (0.091 in.)	Measured optically

Note: Die-cut part thickness will depend upon size, geometry, and density.

### RoHS STATUS

RoHS Material*	Pass/Fail
Lead (Pb) Content	Pass
Cadmium (Cd) Content	Pass
Hexavalent Chromium (Cr6) Content	Pass
Mercury (Hg) Content	Pass
Bromine (Br) Compounds	Pass

\*W. L. Gore & Associates declares that we do not intentionally add substances listed in Directive 2002/95/EU to GORE-SHIELD® GS8000 Conductive Foam. Independent lab tests have been performed and results are available upon request.

Useful RF Grounding Pad Distances	Gap Distance
GS8000-063	0.30-0.9 mm (0.012 - 0.035 in.)
GS8000-126	0.60-2.2 mm (0.024 - 0.087 in.)

Electrical Properties (at 60% Compression)	
DC Resistance	Refer to Chart 1

Physical Properties (22°C at 50% R.H.)	
Compression Set	15%
% Recovery	85%

Note: Performance under various ALT (Accelerated Life Testing) conditions available upon request.

Temperature Limit	-45°C to 85°C
-------------------	---------------

Adhesive Properties	Typical Perf.	Method
Adhesive Peel Test	>990 g per 25 mm width	ART 1005
Adhesive Shear Test	0.031 MPa: 20°C Stainless Steel	Gore Method

### W. L. Gore & Associates, Inc.

GORE-SHIELD, GORE and designs are trademarks of W. L. Gore & Associates, Inc. ©2008 W. L. Gore & Associates, Inc.

North America  
1 (800) 445-GORE (4673)

Europe  
+49 9144 6010  
+44 1382 561511

International  
1 (302) 292-5100

China: Beijing  
+86 10 6510 2980

China: Shanghai  
+86 21 6247 1999

China: Shenzhen  
+86 755 8359 8262

[gore.com/emi](http://gore.com/emi)

More international phone numbers can be found at [gore.com/phone](http://gore.com/phone)

Japan  
+81 3 3570 8712

Korea  
+82 2 393-3411

Taiwan  
+886 2 8771 7799

Singapore  
+65 6 733 2882

