


REVISIONS

LTR.	DESCRIPTION	DATE	CHNG'D BY
A	Released For Production	08/03/01	-
B	Text Changes For Copyright Compliance	10 OCT 2005	EL

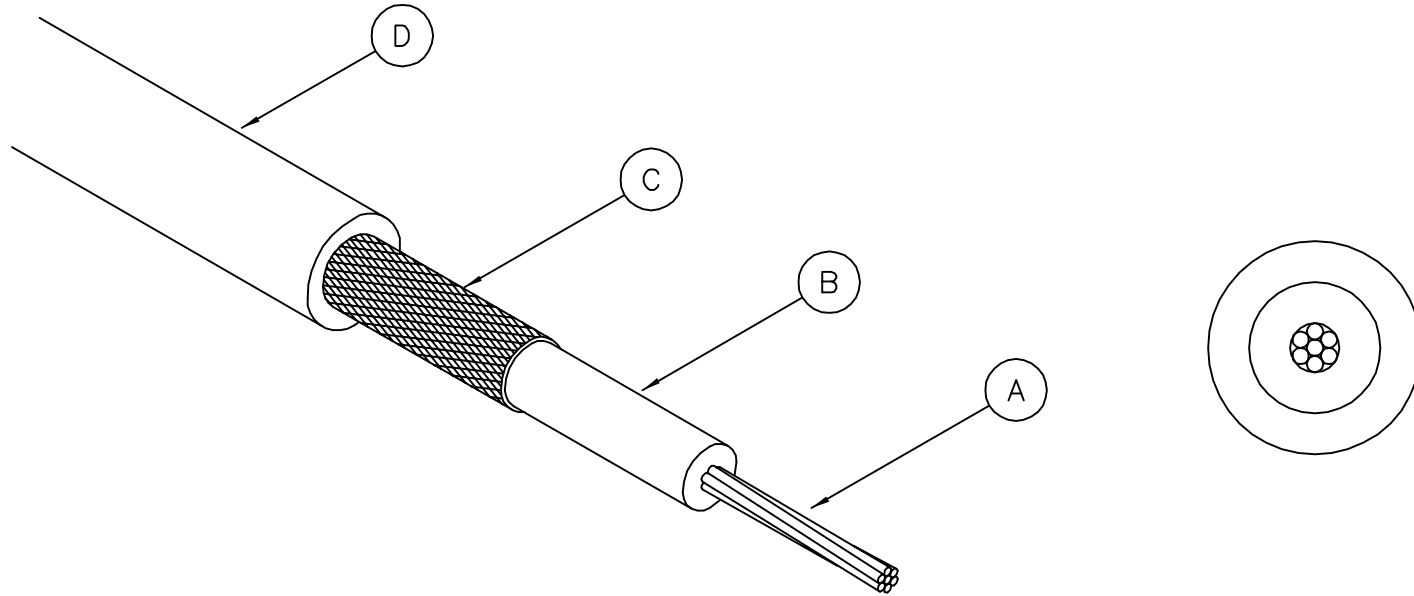

ITEM	DESCRIPTION	CONSTRUCTION DETAILS
A.	Conductor:	AWG 30(7/38) SILVER PLATED COPPER CLAD STEEL, 0.012" NOMINAL
B.	Dielectric:	FEP, .033" NOMINAL DIAMETER
C.	Shield:	AWG 40(1) SPC BRAIDED SHIELD
D.	Jacket:	GRAY FEP, 0.006" THICK, 0.058" +/- .003"

ELECTRICALS:

IMPEDANCE - 50 +/- 2 OHMS
 CAPACITANCE - 30 PF/FT NOM
 VELOCITY OF PROPAGATION - 69% OF AIR NOM
 ATTENUATION - 29 DB/100FT NOM @ 400 MHZ

DIELECTRIC BREAKDOWN - 1000 VOLTS



W. L. GORE & ASSOCIATES, INC.
 555 Paper Mill Road
 Newark, Delaware 19711
 Phone: 302/738-4880 * FAX 302/738-7710

TITLE					
PROCESS DEPT.	DATE	ENG'R	DATE		
		SDL	08/03/01		
		SIZE	DWG. NO.	REV.	
		A	CXN3404	B	