


Woven PTFE-Coated Fiberglass 6250

Expanded PTFE Membrane on Woven PTFE-Coated Fiberglass

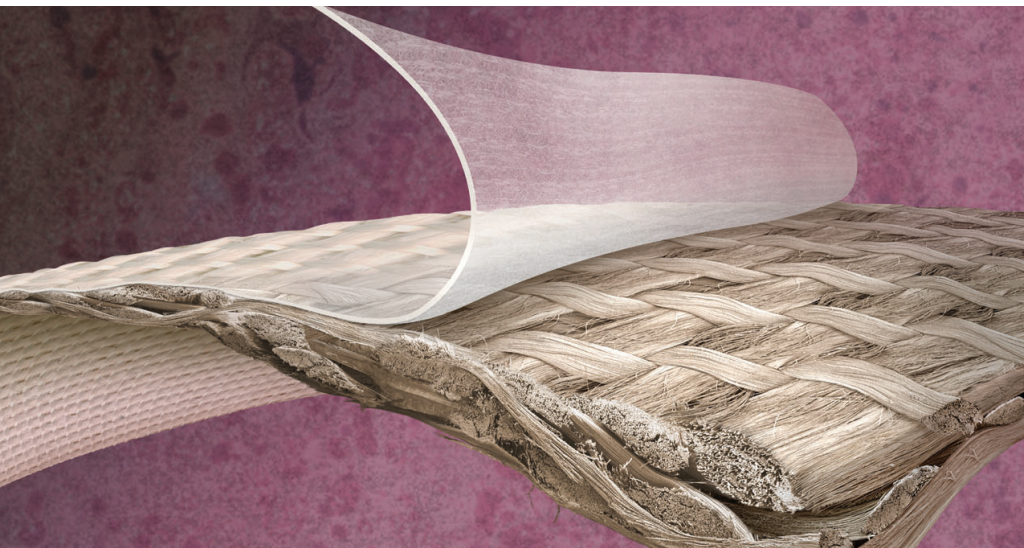

Fiber	Fiberglass
Yarn Type	
Warp	75 1/2
Fill	75 2/2 Tex
Finish (Base Fabric)	PTFE
Weight (Nominal)	22 oz/yd ² 750 g/m ²
Weave Pattern	Double Filling Face
Thread Count	48 x 40 (Warp x Fill)
Air Permeability (Average)	7.5 cfm/ft ² @ 0.5" wg 3.8 (m ³ /min/m ² @ 20 mm wg)
Continuous Service Temperature	500°F 260°C
Mullen Burst Strength	900 psi 6205 kilopascals
Breaking Strength	
Warp	350 Lbf/1" modified cut strip 1558N/2.54 cm modified cut strip
Fill	450 Lbf/1" modified cut strip 2002 N/2.54 cm modified cut strip

To place an order or to learn more about PRISTYNE® Filter Media, please contact us:

By telephone

+49 89 4612 - 22 48 (Europe)
+86 21 5172 8299 (China)
+1 800 542 2434 (US)

By fax

+49 89 4612 - 23 08 (Europe)
+86 21 6247 9199 (China)
+410 506 3463 (US)

By e-mail

sales@pristyne.com

On the Web

www.pristyne.com

W.L.Gore & Associates

101 Lewisville Road
Elkton, MD 21922
USA

All data expressed as typical values. This specification is subject to change. Please contact PRISTYNE® Media Group directly to confirm current information.

FOR INDUSTRIAL USE ONLY. Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations.

