


Woven Polyester Fabric 3220

Expanded PTFE Membrane on Woven Polyester Fabric

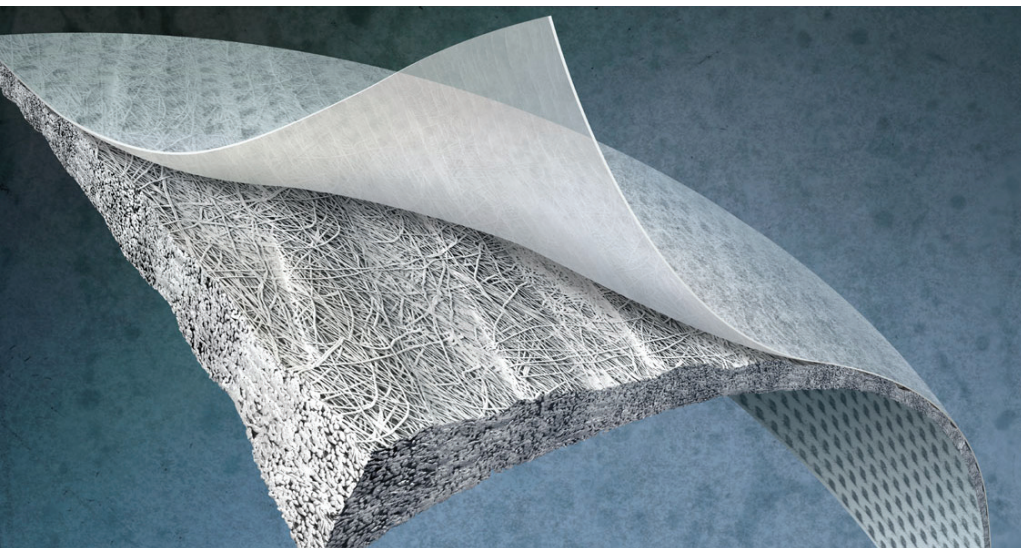

Fiber	Polyester
Yarn Type	
Warp	100% Polyester 2 x 150/34
Fill	100% Polyester 2 x 150/34
Finish (Base Fabric)	N/A
Weight (Nominal)	6.8 oz/yd ² 230 gm/m ²
Air Permeability (Average)	6.0 cfm/ft ² @ 0.5" wg 3.0 (m ³ /min/m ² @ 20 mm wg)
Continuous Service Temperature	275°F 135°C
Mullen Burst Strength	350 psi (minimum average) 2414 kilopascals
Breaking Strength	
Warp	160 Lbf/1" (minimum average) 708 N/2.54 cm
Fill	200 Lbf/1" (minimum average) 880 N/2.54 cm

To place an order or to learn more about PRISTYNE® Filter Media, please contact us:

By telephone

+49 (0) 89 4612 - 22 48 (Europe)
+86 21 6247 1999 (China)
+1 800 542 2434 (US)

By fax

+49 (0) 89 4612 - 23 08 (Europe)
+86 21 6247 9199 (China)
+410 506 3463 (US)

By e-mail

sales@pristyne.com

On the Web

www.pristyne.com

W.L.Gore & Associates

101 Lewisville Road
P.O. Box 917
Elkton, MD 21922
USA

All data expressed as typical values.
This specification is subject to change.
Please contact PRISTYNE® Media Group directly to confirm current information.

