


Polyester Felt 3110

Expanded PTFE Membrane on Polyester Felt

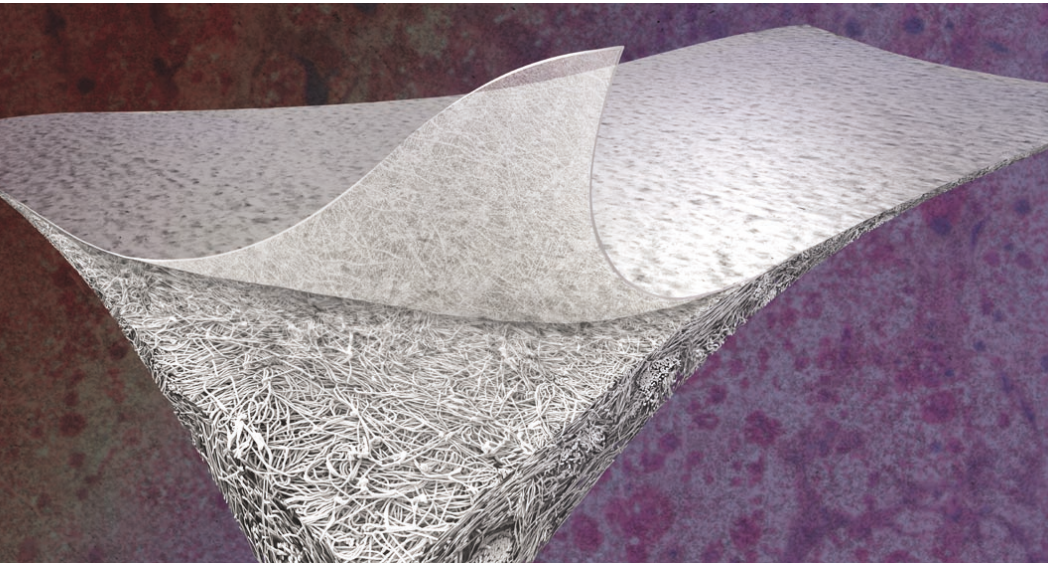

Fiber	Polyester
Scrim	100% Ring Spun Polyester
Finish (Base Fabric)	N/A
Weight (Nominal)	12.0 oz/yd ² 407 gm/m ²
Air Permeability (Average)	9.5 cfm/ft ² @ 0.5" wg 4.5 m ³ /min/m ² @ 20 mm wg
Continuous Service Temperature	275°F 135°C
Mullen Burst Strength	250 psi (minimum average) 1724 kilopascals
Breaking Strength	
Warp	100 Lbf/2" (minimum average) 440 N/5 cm
Fill	200 Lbf/2" (minimum average) 885 N/5 cm

To place an order or to learn more about PRISTYNE® Filter Media, please contact us:

By telephone

+49 (0) 89 4612 - 22 48 (Europe)

+86 21 6247 1999 (China)

+1 800 542 2434 (US)

By fax

+49 (0) 89 4612 - 23 08 (Europe)

+86 21 6247 9199 (China)

+410 506 3463 (US)

By e-mail

sales@pristyne.com

On the Web

www.pristyne.com

W. L. Gore & Associates

101 Lewisville Road

P.O. Box 917

Elkton, MD 21922

USA

All data expressed as typical values. This specification is subject to change. Please contact PRISTYNE® Media Group directly to confirm current information.

