


# Homopolymer Acrylic Felt 2120

Expanded PTFE Membrane on Homopolymer Acrylic Felt

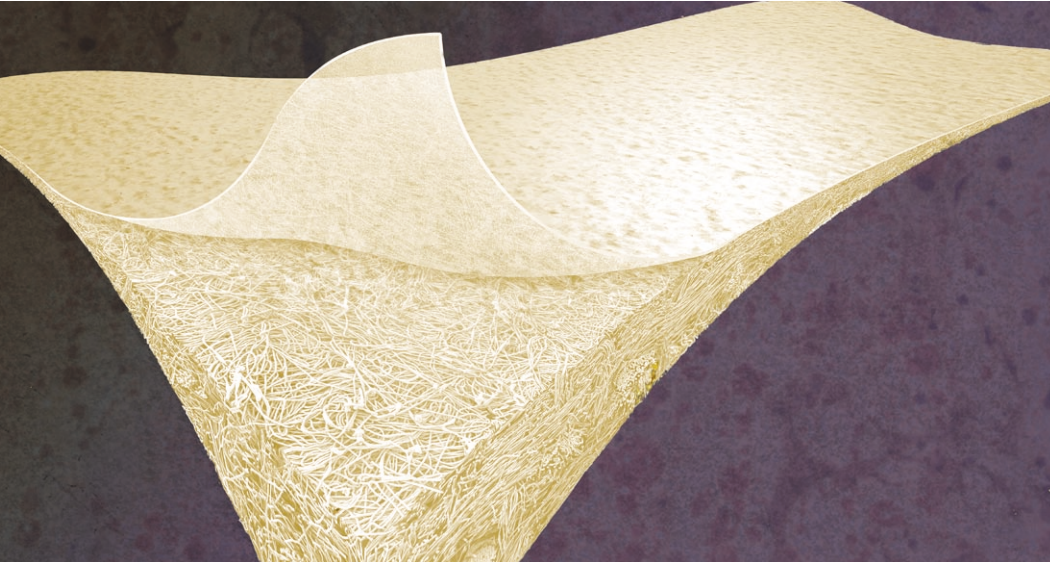

To place an order or to learn more about PRISTYNE® Filter Media, please contact us:

**By telephone**

+49 (0) 89 4612 - 22 48 (Europe)

+86 21 6247 1999 (China)

+1 800 542 2434 (US)

**By fax**

+49 (0) 89 4612 - 23 08 (Europe)

+86 21 6247 9199 (China)

+410 506 3463 (US)

**By e-mail**

sales@pristyne.com

**On the Web**

www.pristyne.com

**W. L. Gore & Associates**

101 Lewisville Road

P.O. Box 917

Elkton, MD 21922

USA

Fiber	Homopolymer Acrylic
Scrim	100% Homopolymer Acrylic
Finish (Base Fabric)	N/A
Weight (Nominal)	14.0 oz/yd <sup>2</sup> 475 gm/m <sup>2</sup>
Air Permeability (Average)	4.5 cfm/ft <sup>2</sup> @ 0.5" wg 2.2 m <sup>3</sup> /min/m <sup>2</sup> @ 20 mm wg
Continuous Service Temperature	260°F 125°C
Mullen Burst Strength	350 psi (minimum average) 2413 kilopascals
Breaking Strength	
Warp	150 Lbf/2" (minimum average) 665 N/5 cm
Fill	170 Lbf/2" (minimum average) 755 N/5 cm

All data expressed as typical values. This specification is subject to change. Please contact PRISTYNE® Media Group directly to confirm current information.

