


PPS Felt 4110

Expanded PTFE Membrane on PPS Felt

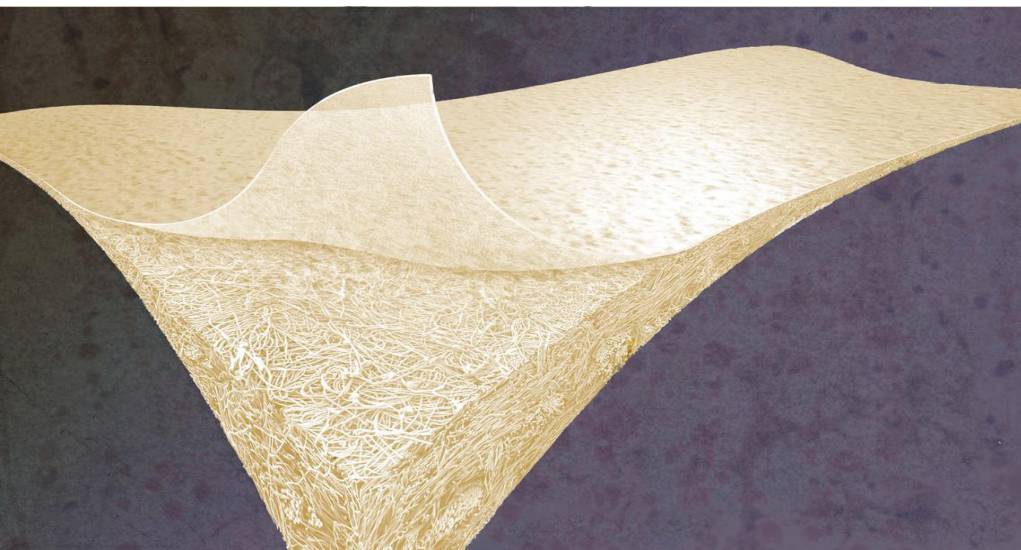

Fiber	Polyphenylene Sulfide (PPS)
Scrim	100% PPS
Finish (Base Fabric)	N/A
Weight (Nominal)	16.0 oz/yd ² 542 gm/m ²
Air Permeability (Average)	3–6 cfm/ft ² @ 0.5" wg 1.5–2.9 (m ³ /min/m ² @ 20 mm wg)
Continuous Service Temperature	375°F 190°C
Mullen Burst Strength	400–700 psi (average) 2758–4827 kilopascals
Breaking Strength	
Warp	150–250 Lbf/2" (average) 660–1100 N/5 cm ravel
Fill	230–430 Lbf/2" (average) 1017–1913 N/5 cm ravel

To place an order or to learn more about PRISTYNE® Filter Media, please contact us:

By telephone

+49 (0) 89 4612 - 22 48 (Europe)

+86 21 6247 1999 (China)

+1 800 542 2434 (US)

By fax

+49 (0) 89 4612 - 23 08 (Europe)

+86 21 6247 9199 (China)

+410 506 3463 (US)

By e-mail

sales@pristyne.com

On the Web

www.pristyne.com

W.L.Gore & Associates

101 Lewisville Road

P.O. Box 917

Elkton, MD 21922

USA

All data expressed as typical values.
This specification is subject to change.
Please contact PRISTYNE® Media Group
directly to confirm current information.



© 2009 W. L. Gore & Associates, 005-4-890-034 4/09

GORE, PRISTYNE and designs are trademarks of W. L. Gore & Associates.

