


Woven RASTEX® Fiber Fabric 7210

Expanded PTFE Membrane on Woven RASTEX® Fiber Fabric

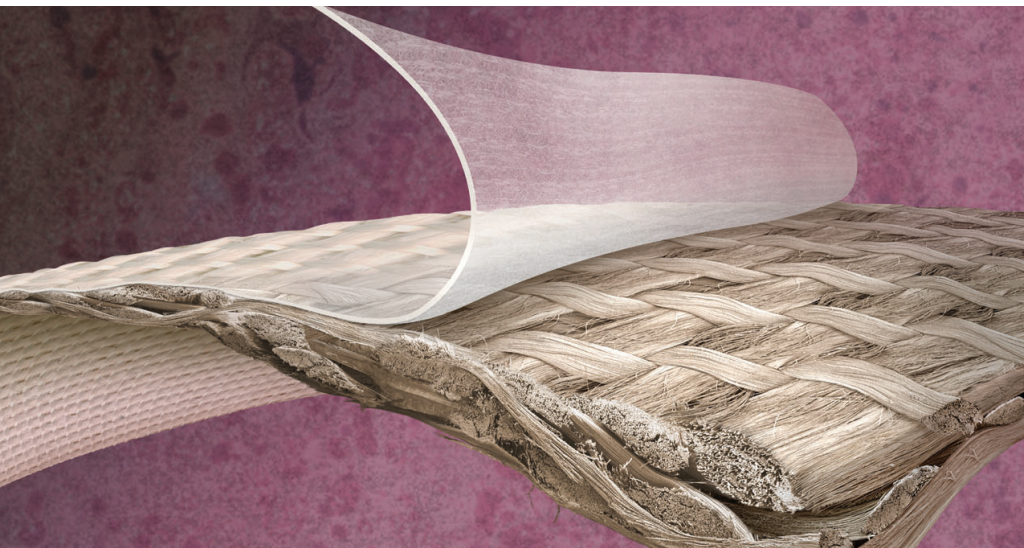

Fiber	PTFE Monofilament
Yarn Type	
Warp	400 Denier Monofilament
Fill	400 Denier Monofilament
Weight (Nominal)	8.5 oz/yd ² 288 g/m ²
Weave Pattern	4 Harness Satin
Thread Count	80 x 72 (Warp x Fill)
Air Permeability (Average)	12.0 cfm/ft ² @ 0.5" wg 6.0 (m ³ /min/m ² @ 20 mm wg)
Continuous Service Temperature	500°F 260°C
Mullen Burst Strength	500 psi 3447 kilopascals
Breaking Strength	
Warp	300 Lbf/1" modified grab 1334 N/2.54 cm modified grab
Fill	275 Lbf/1" modified grab 1223 N/2.54 cm modified grab

To place an order or to learn more about PRISTYNE® Filter Media, please contact us:

By telephone

+49 89 4612 - 22 48 (Europe)

+86 21 5172 8299 (China)

+1 800 542 2434 (US)

By fax

+49 89 4612 - 23 08 (Europe)

+86 21 6247 9199 (China)

+410 506 3463 (US)

By e-mail

sales@pristyne.com

On the Web

www.pristyne.com

W.L.Gore & Associates

101 Lewisville Road

Elkton, MD 21922

USA

All data expressed as typical values.
This specification is subject to change.
Please contact PRISTYNE® Media Group
directly to confirm current information.

FOR INDUSTRIAL USE ONLY. Not for use in food,
drug, cosmetic or medical device manufacturing,
processing, or packaging operations.

