


REVISIONS

LTR.	DESCRIPTION	DATE	CHNG'D BY
—	Released For Production	02/09/01	—
A	Change Temp Rating/Add Cap. Spec.	12/07/04	—
B	Text Changes For Copyright Compliance	10 OCT 2005	EL

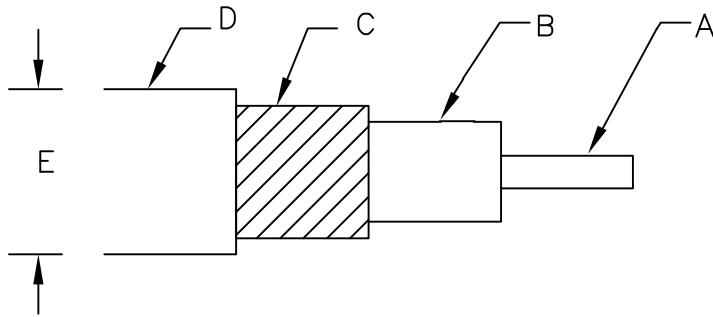


NOTES:

VOLTAGE RATING: 200 VOLTS
 TEMPERATURE RATING: -20° TO 200°C
 IMPEDANCE: 50 OHMS NOMINAL
 CAPACITANCE: 28 pF/ft NOMINAL
 CONDUCTOR RESISTANCE: .75 OHMS/FT NOMINAL
 1.00 OHMS/FT MAXIMUM

CONSTRUCTION: 50 OHM COAX

- A. CONDUCTOR: AWG 38 (7/46) SILVER PLATED ALLOY (J-764)
- B. DIELECTRIC: ePTFE (J-755)
- C. SHIELD: AWG 48(1) SILVER PLATED COPPER SERVED WIRE
- D. JACKET: .001" NOMINAL WALL OF FLUOROPOLYMER
- E. OVERALL DIAMETER: .018" NOMINAL.

<p><u>PROPRIETARY NOTE</u> W. L. GORE & ASSOCIATES, INC. PROPRIETARY DATA</p> <p>The data and information disclosed hereon is furnished upon the following understanding and agreement:</p> <p>By acceptance of this document you agree that all rights to the drawings, specifications, processes, and other data contained therein, as well as the proprietary and novel features of the subject matter, are reserved by W.L. Gore and are disclosed in confidence. They are not to be manufactured, used, sold or disclosed to others, nor are devices embodying such features or information derived from these disclosures to be used or disclosed, unless and until expressly authorized by W. L. Gore. These drawings, specifications, processes, etc. are and remain the property of W.L. Gore and are not to be copied or reproduced without express permission, and are to be returned upon request therefor.</p>		<p>W. L. GORE & ASSOCIATES, INC. 555 Paper Mill Road Newark, Delaware 19711 Phone: 302/738-4880 * FAX 302/738-7710</p> 	
<p>TITLE</p> <p>MINI 50 OHM COAX</p>			
CHK'D BY	DATE	DRW'N BY	DATE
		RRH	02/09/01
APPROVED BY	DATE	SIZE	DWG. NO.
		A	CXN3369
			REV. B