COMPONENT	MATERIAL	FINISH
CONTACT	BeCu TEMPER TD04, ALLOY C17300, ASTM B196	GOLD PLATE PER ASTM B-488 50 MICROINCHES MIN. OVER NICKEL PLATE PER QQ-N-290, 50 MICROINCHES MIN.
INSULATOR	PTFE, ASTM D1710, TYPE I, GRADE 1, CLASS A	–
BODY	303 CRES, ASTM A582	PASSIVATE, QQ-P-35

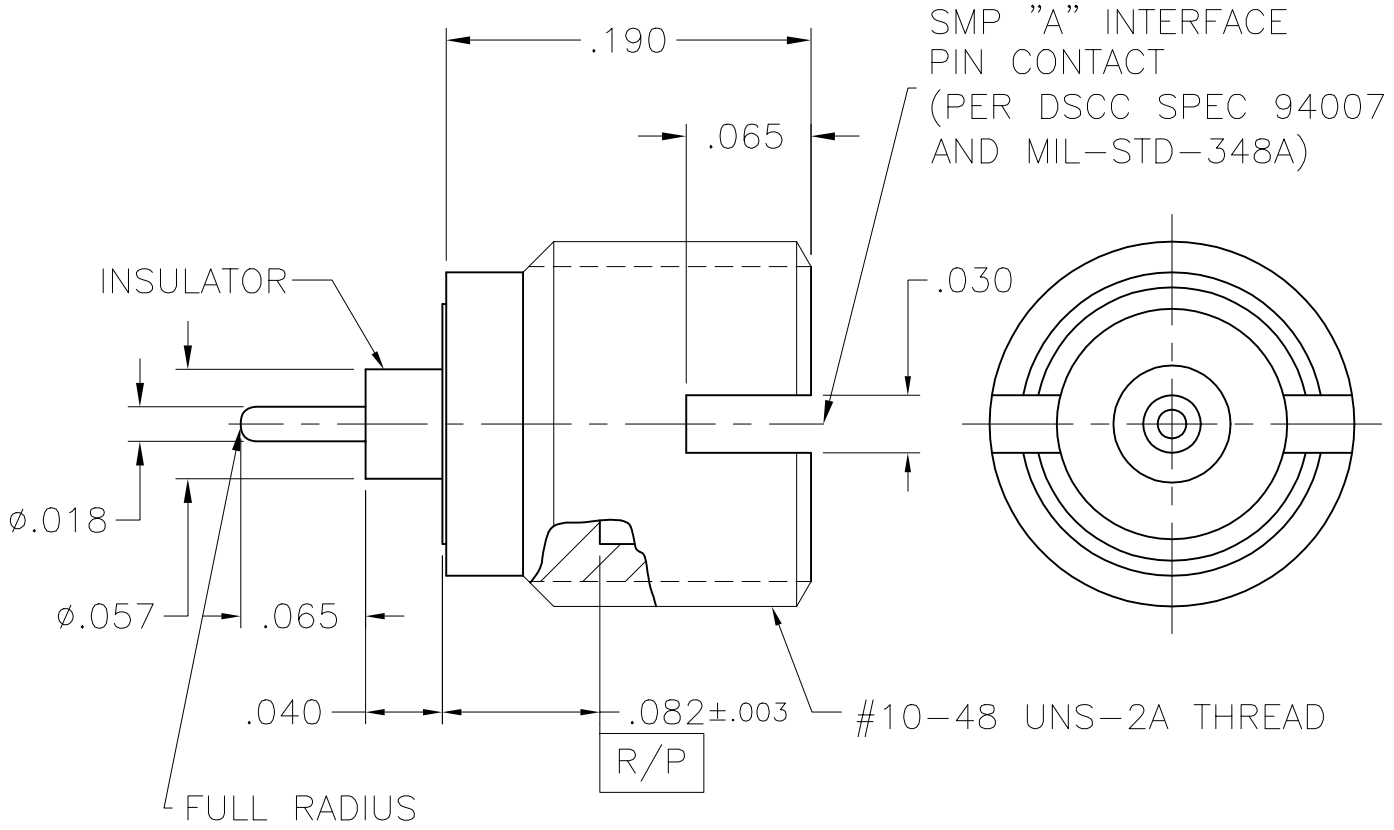

100-123-0014	SMOOTH BORE	100-123-0013
100-123-0007	FULL DETENT	100-123-0006
100-123-0001	LIMITED DETENT	100-123-0002
CATALOG NUMBER	"A" SMP INTERFACE	INSERTION/EXTRACTION TOOL

NOTE:
ALL DIMENSIONS NOMINAL UNLESS OTHERWISE SPECIFIED

© 2001 W. L. Gore & Associates, Inc.

W. L. GORE & ASSOCIATES, INC. (Gore)
P.O. BOX 9236, NEWARK, DELAWARE 19714

By acceptance of this document you agree that all rights to drawings, specifications, processes, and other data contained therein, as well as the proprietary and novel features of the subject matter, are reserved by Gore and are disclosed in confidence. They are not to be manufactured, used, sold or disclosed to others, nor are devices embodying such features or information derived from these disclosures to be used or disclosed, unless and until expressly authorized by Gore. These drawings, specifications, processes, etc., are and remain the property of Gore and are not to be copied or reproduced without express permission, and are to be returned upon request therefor.

INSERTION/EXTRACTION TOOL	TITLE		
SEE TABLE	SMP PIN THREAD-IN STRAIGHT TERMINAL		
MOUNTING PROCEDURE	CATALOG NUMBER	DRAWING NUMBER	REV.
100-123-0003	***SEE TABLE***	508A10754	B