


Valid only at time of printing

Construction

- | | |
|-----------------------------------|-----------------------|
| 1. Optical fiber, multimode | 50/125/245 |
| 2. Buffer material | ePTFE |
| 3. Sheath material colour | Thermoplastic natural |
| 4. Buffer material | ePTFE |
| 5. Braided strain relief material | Aramid fiber |
| 6. Jacket material colour | Fluoropolymer yellow |

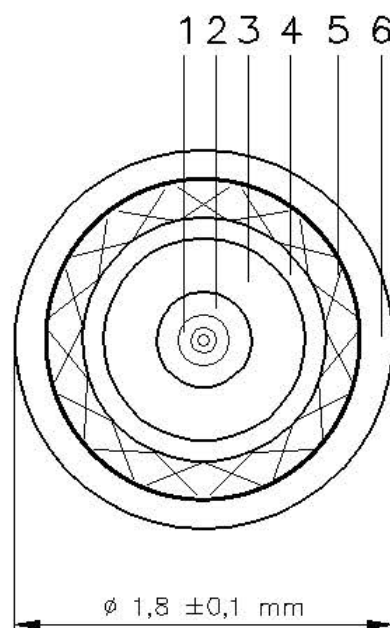

Characteristics

- | | |
|-----------------------------|---|
| Operating temperature range | -65°C to +135°C |
| Weight | 4 g/m max. |
| Tensile strength | 200 N max. |
| Optical Loss | ≤ 5,0 dB/km at 850 nm
≤ 3,0 dB/km at 1300 nm |
| Bandwidth | OM3 |

Ersatz für / Replacement for		Ersetzt durch / Replaced by		Formular Beschreibung / Description	
				Benennung / Description Fibre Optic Simplex Cable OM3	
D	17.05.18	SH	11873		
Revision	Date	Author	PLFECO no.		
 W. L. GORE & ASSOCIATES GMBH Nordring 1 • 91785 Pleinfeld • Germany Tel. +49 9144 6010 • Fax +49 9144 6816 gore.com				Identnr. / Ident No. GSC-13-84943-04	Seite / Page 1/1