



Materials Technology

Water Entry Pressure Testing

The term, WEP is often referenced in Gore literature and is synonymous with water entry pressure testing.

Water entry pressure is the minimum pressure required to force water through the largest opening of a dry hydrophobic membrane.


The pressure required to force water through the structure is inversely proportional to opening size and dependent on the polymeric properties of the membrane.

Water entry pressure represents the filter's ability to serve as an aqueous barrier. This is an important characteristic to consider in hydrophobic venting.

Standard test used to measure a membrane's ability to stop aqueous flow.

Factors that affect water entry pressure include: pore size, surface tension of the liquid, surface free energy of the membrane and size of the largest opening.

APPARATUS FOR WATER ENTRY PRESSURE TESTING

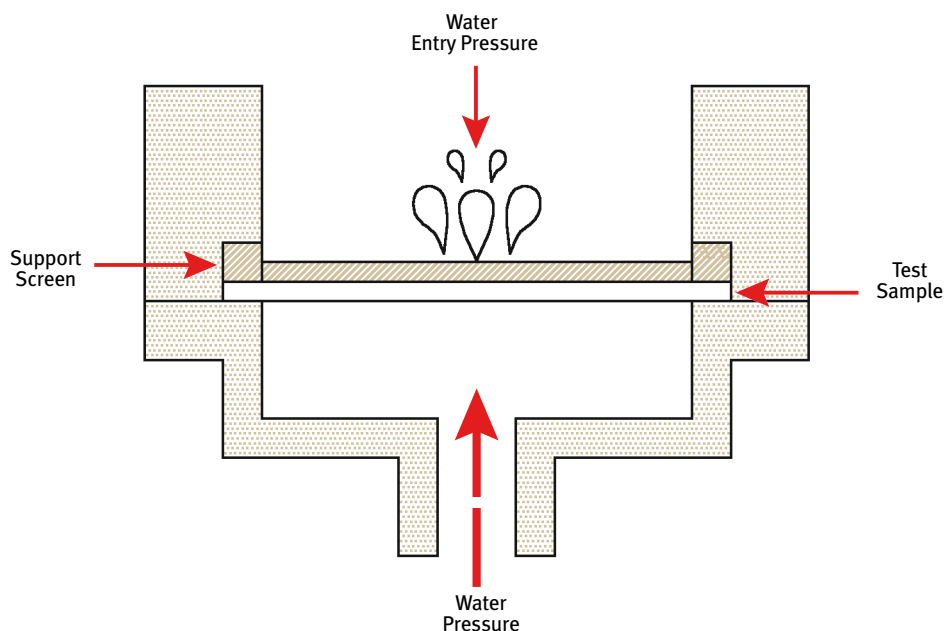

W. L. GORE & ASSOCIATES, INC.
401 Airport Road • Elkton, MD 21921 • USA
Phone: 1.410.392.4440 • Toll-Free: 1.800.455.4670
Fax: 410.506.7993

gore.com

FOR INDUSTRIAL USE ONLY. Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations.

GORE and design are trademarks of W. L. Gore & Associates. All rights reserved.
© 2011 W. L. Gore & Associates, Inc. Printed in USA.

