


Valid only at time of printing

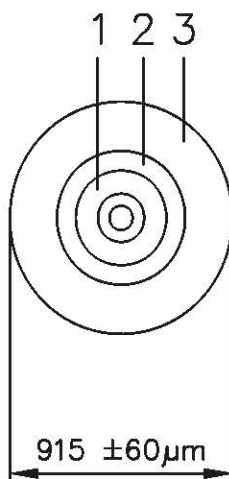

Construction

- | | |
|-----------------------------|-----------------------|
| 1. Optical Fiber, multimode | 9/125/245 |
| 2. Buffer material | ePTFE |
| 3. Sheath material colour | Thermoplastic natural |

Characteristics

- | | |
|-----------------------------|--|
| Operating temperature range | -55°C to +125°C |
| Weight | 0,85 g/m |
| Optical Loss | max. 1,4 dB/km at 1310 nm
max. 1,4 dB/km at 1550 nm |

Ersatz für / Replacement for		Ersetzt durch / Replaced by		Formular Beschreibung / Description	
				Benennung / Description FIBER OPTIC CABLE 900 - SM	
A	06.09.17	SH	-		
Revision	Date	Author	PLFECO no.		
 W. L. GORE & ASSOCIATES GMBH Nordring 1 • 91785 Pleinfeld • Germany Tel. +49 9144 6010 • Fax +49 9144 6816 gore.com				Identnr. / Ident No. GSC-13-85375-00	Seite / Page 1/1