

Case history

GORE® LOW DRAG Filter Bags – Improving Process Efficiency in TiO₂ Production

Challenge

A customer was employing standard filter bags (ePTFE membrane on polyester felt backer) in finishing bag houses in the production of titanium dioxide (TiO₂) pigments. New product lines with enhanced TiO₂ particle surface treatment subsequently posed filtration challenges. Compounding the challenge was the introduction of an additional feed line (dual feed) to some of their bag houses to help meet production rates/targets. As a result of these changes, the pressure drop (dP) across the bag house exceeded set limits, which necessitated stopping production every 30 minutes for offline cleaning. The customer desired a filter bag with improved cleanability, to reduce the need for offline cleaning and improve production efficiency.

Solution

The customer replaced its traditional membrane filter bags with GORE® LOW DRAG Filter Bags. These filters incorporate a proprietary ePTFE advanced membrane comprising a more cleanable surface which facilitates lower baghouse dP and increased airflow. The enhanced cleanability and decreased dP enabled the continuous operation of the feed bin, without the need to pause production for offline cleaning.

Application:
TiO₂ Production (Packing Bin)

Baghouse Type:
Pulse Jet


Filtration Material:
GORE® LOW DRAG Filter Bags
(543 g/m² polyester felt backer)

Bag house feed rate:
8 tons/hour


Air-to-cloth ratio:
1.2 m/min (4 fpm)

Operating temperature:
120 °C (250 °F)

Bag life:
2 years (typical)

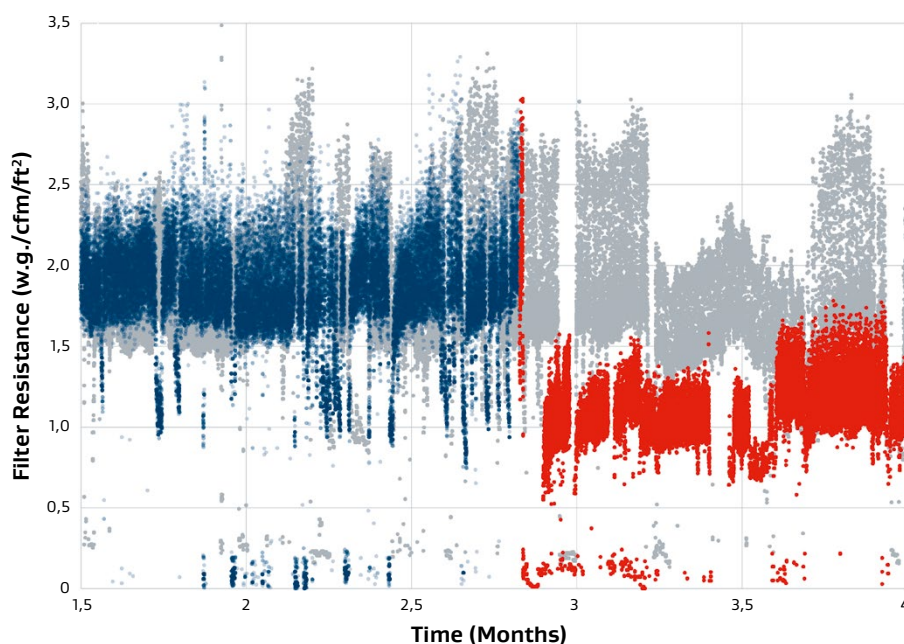

- Baghouse A
Standard Filter Bags
- Baghouse A
GORE® LOW DRAG Filter Bags
- Baghouse B
Standard Filter Bags

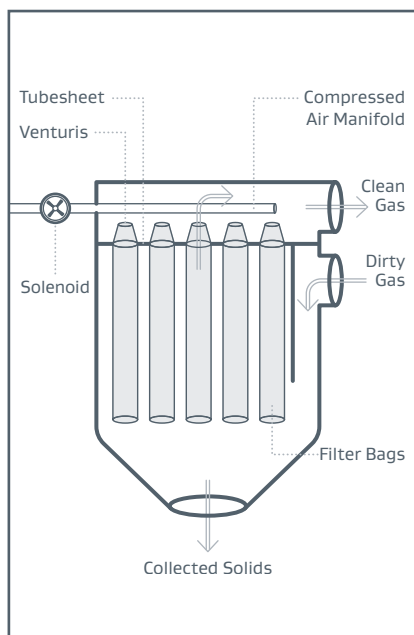

Result

Cleanability of a filter bag is directly related to filter resistance, which is the differential pressure divided by the air-to-cloth ratio (ACR).

Lower measured filter resistance is indicative of a more cleanable surface, ultimately resulting in lower DP and longer bag life. The figure on the front page compares the measured filter resistance in two identical feed bin baghouses.

Baghouse A was initially fitted with standard membrane filters, which were then subsequently replaced with GORE® LOW DRAG Filter Bags at 2.5 months. Standard membrane filters were installed in Baghouse B for the entire duration of the experiment as a control. The data clearly show that the measured resistance was reduced by 50% after installation of the GORE® LOW DRAG Filter Bags, whereas the control baghouse stayed constant. In this case, the lower filter resistance also facilitated continuous operation of the feed bin without exceeding the prescribed dP limit of the baghouse, improving the process efficiency and throughput. Improvements were realized in both single and dual feed systems.

FOR INDUSTRIAL USE ONLY. Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations.

All technical information and advice given here are based on Gore's previous experiences and/or test results. Gore gives this information to the best of its knowledge, but assumes no legal responsibility. Customers are asked to check the suitability and usability in the specific application, since the performance of the product can only be judged when all necessary operating data are available. The above information is subject to change and is not to be used for specification purposes. Gore's terms and conditions of sale apply to the sale of the products by Gore.

GORE, *Together, improving life* and designs are trademarks of W. L. Gore & Associates. © 2019 W. L. Gore & Associates GmbH