

GORE® Protective Vents

Case History

INCREASE SERVICE LIFE OF SOLAR TRACKING SYSTEMS BY EQUALIZING PRESSURE



Together, improving life



Situation

Dunkermotoren, a global manufacturer with operations in Germany, the United States and China, provides solar tracking solutions that are installed worldwide. This equipment combines a DC or brushless DC (BLDC) motor, integrated electronics and gearbox to track the sun's location for photovoltaic, concentrated photovoltaic and concentrated solar power systems. These systems are installed in locations that experience extreme weather conditions such as long hours of direct sunlight, wide temperature ranges, high winds, dust, hail and driving rain. Therefore, the electronics and motors must be protected against these environmental conditions to ensure reliable performance for the systems' expected service life.


Dunkermotoren engineered a sealed housing with O-rings and connector seals to protect its motor components from liquid and contaminant ingress; however, the motors were experiencing corrosion issues once installed in the field. These issues increased customer returns and warranty claims. When developing their new STM™ system, they focused on improving the motor's durability to meet the intended service life and increase customer satisfaction.

Challenge

The exposure to the direct sun during the day and cool temperatures at night causes significant temperature changes outside the housing. In addition, a sudden rainstorm on a hot sunny day can result in the temperature dropping rapidly. In an enclosure designed to be completely sealed, these changes can cause significant pressure differentials inside the housing, which can create in a vacuum that puts stress on the housing seals. Over time, this fatigue can lead to failures — creating leak paths for liquid and particulate contaminants. However, providing an opening to allow the housing to release pressure (in other words, breathe) creates a known leak path. Therefore, this opening would need some level of protection. For the new design, Dunkermotoren's engineering team decided to test various venting options to eliminate potential seal failure due to pressure differentials.



"GORE® Protective Vents extend the life of our motors by achieving the durability of IP67 protection against exposure to harsh environments. Gore's engineers understood our requirements and worked like part of our team to ensure that our products deliver the performance our customers expect."

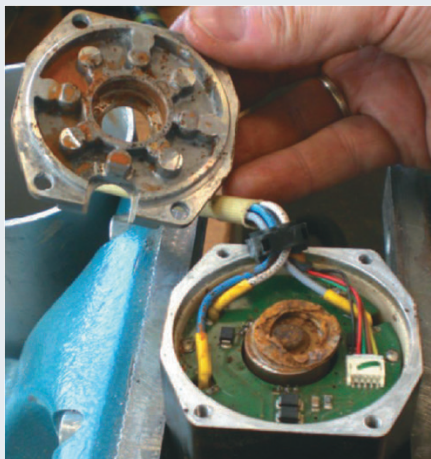

Before vent installation



After vent installation



Available in a variety of designs, sizes and product forms, GORE® Protective Vents equalize pressure, prevent contamination and reduce condensation in a variety of applications. The GORE® Metal Vent is ideal for Dunkermotoren's BLDC motor because of its added durability.

Solution

Based on feedback from their customers, the engineering team decided to evaluate GORE® Protective Vents. Gore's application engineers collaborated with the Dunkermotoren engineers to evaluate several GORE® Protective Vents in both environmental chamber tests and field tests. Based on the results of these tests and the need to integrate the vent into an existing product design, Gore recommended a GORE® Metal Vent. This vent equalizes pressure within the motor by maintaining sufficient airflow to allow air and moisture vapor to pass in and out of the enclosure freely. At the same time, the vent serves as a barrier to provide a high level of ingress protection (IP*) against liquid, dirt, dust, salt and other contaminants. The rugged screw-in construction of GORE® Metal Vents extends the system's service life and is easy to integrate into new or existing product designs.

According to Will Vinson, President of Dunkermotoren USA, Inc., a division of AMETEK Precision Motion Control, their goal was to develop a more durable product to exceed service-life expectations. "With our new STM™ product, we wanted to deliver a tracking system that would last for the expected life of the solar energy system — more than 20 years. GORE® Protective Vents extended the life of our motors by achieving the durability of IP67 protection against exposure to harsh environments. Gore's engineers understood our requirements and worked like part of our team to ensure that our products deliver the performance our customers expect."

Diverse Product Line Engineered for Simple Integration

GORE® Protective Vents are manufactured in many different sizes and shapes, making it easy to choose the optimal vent to meet the design and performance requirements of a specific application. The versatility of GORE® Protective Vents is apparent in both their range of protection and their ease of installation. For example, these vents:

- Tolerate temperatures ranging from –40°C to 150°C
- Can meet protection standards up to IP69K
- Install easily by being adhered, threaded, snapped or heat/ultrasonic-welded to a variety of enclosure materials

About Gore

W. L. Gore & Associates is a global materials science company dedicated to transforming industries and improving lives. Since 1958, Gore has solved complex technical challenges in demanding environments — from outer space to the world's highest peaks to the inner workings of the human body. With more than 11,000 Associates and a strong, team-oriented culture, Gore generates annual revenues of \$3.8 billion.

Gore develops products and technologies that address complex product and process challenges in a variety of markets and industries, including aerospace, automotive, pharmaceutical, mobile electronics and more. Through close collaboration with industry leaders across the globe, Gore enables customers to design their products and processes to be safer, cleaner, more productive, reliable, durable and efficient across a wide range of demanding environments.

Learn more at gore.com/protectivevents.



FOR INDUSTRIAL USE ONLY. Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations.

GORE® Protective Vent(s) are manufactured under the generic industrial ISO 9001 quality system. No other certifications can be provided by Gore for this GORE® Protective Vent. All technical information given is based on Gore's previous experiences and/or test results. Gore gives this information to the best of its knowledge, but assumes no legal responsibility. Customers are asked to check the suitability and usability in the specific application, since the performance of the product can only be judged when all necessary operating data are available. The above information is subject to change and is not to be used for specification purposes. Gore's terms and conditions of sale apply to the sale of the products by Gore..

GORE, *Together, improving life* and designs are trademarks of W. L. Gore & Associates. © 2014–2023 W. L. Gore & Associates, Inc.

INTERNATIONAL CONTACTS

Australia +61 2 9473 6800
Benelux +49 89 4612 2211
China +86 21 5172 8299
France +33 1 5695 6565
Germany +49 89 4612 2211
India +91 22 6768 7000

Italy +39 045 6209 240
Japan +81 3 6746 2570
Korea +82 2 393 3411
Mexico +52 81 8288 1281
Scandinavia +46 31 706 7800
Singapore +65 6733 2882

South America +55 11 5502 7800
Spain +34 93 480 6900
Taiwan +886 2 2173 7799
United Kingdom +44 1506 460123
USA +1 410 506 7812

W. L. Gore & Associates, GmbH
Hermann-Oberth-Str. 26, 85640 Putzbrunn, Germany
T +49 89 4612 2211 F +49 89 4612 2302 E protectivevents@wlgore.com
gore.com/protectivevents

