

LEMO® 2B SERIES CONNECTOR SYSTEM

The following graphs include performance results for a 10-meter cable assembly with a plug and receptacle connector based on RCN9034-24. The test leads are mating LEMO® connectors terminated with shielded microwave coax cables for each primary, and SMA connectors to interface with the test equipment.



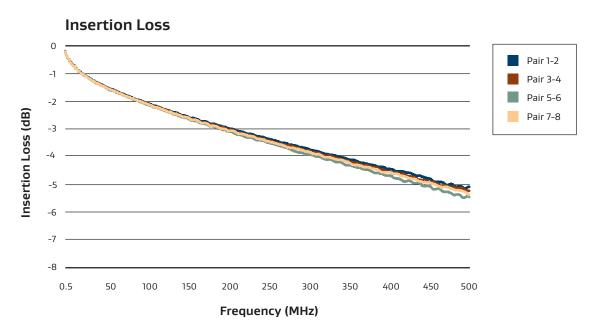

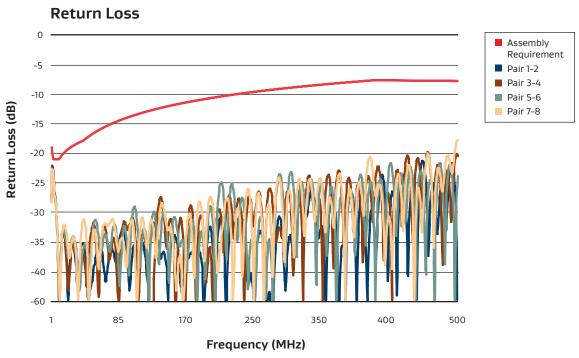

Near-End Crosstalk Assembly Requirement ■ Pairs blue and Brown Pairs Blue and Green Pairs blue and Orange Pairs Green and Orange -40 Pairs Brown and Orange NEXT (dB) Pairs Brown and Green -80 -100 -120 50 100 150 200 250 300 350 400 450 500

Frequency (MHz)

NOTICE — USE RESTRICTIONS APPLY. Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations. LEMO is a registered trademark of LEMO SA.

GORE, Together, improving life, and designs are trademarks of W. L. Gore & Associates. © 2022 W. L. Gore & Associates, Inc.

