

SAMPLES FOR PROTOTYPING & EVALUATION

Complimentary samples of Gore's pre-qualified solutions for prototyping and evaluation are available with short lead times based on in-stock availability. All samples are shipped by our authorized global distributors, WireMasters (US) and A.E. Petsche Co./Pansystem or Air Cost Control (Europe).

OEMs can now validate and support low-rate production using Gore's standard products in their specific applications with lower technical and business risks to their programs.

Fill out a short online form and receive your complimentary samples. Alternatively, contact a Gore representative for aerospace and defense today regarding available materials for your sample, prototype, and small production requirements.

Reduce Costs with Pre-Qualified Solutions

Gore's portfolio of high-speed copper, fiber optic, and hybrid solutions in compact, routable designs support the latest standardized protocols such as Ethernet, CAN Bus, FireWire®, USB, HDMI, Fibre Channel, and more.

All of our solutions have undergone substantial qualification testing to ensure they meet the most rigorous aerospace and defense industry standards and customer requirements.

For example, our award-winning Ethernet cables exceed Cat6A protocol requirements and are approved to SAE AS5670™ and VG95218-31 standards, as well as on the Qualified Parts List (QPL).

The award-winning 1.8 mm Simplex version of our fiber optic cables with enhanced crust protection exceeds ARINC-803 industry standards and meets STANAG 4754 vehicle architecture standards. This version also exceeds EN3745-513 and JN1177 requirements intended for larger, more rugged designs on 10 up to 100 Gb/s networks.



OEM Benefits

- Short lead times for samples, prototype, small production quantities
- Validate and support low-rate production in applications
- Lower technical and business risks to programs
- Reduce costs with pre-qualified solutions proven in real-world conditions
- Smaller designs, reduced weight, lifelong performance in avionics and vetronics

gore.com/hsdc-sample-form-air-defense

+1 800 626 7708

GORE® High Speed Data Cables


For Aerospace & Defense

Gore's Standard Copper Cables

Cable Type/Protocol	Construction	Standard Impedance Ohms	Gore Part Number	
Shielded Twisted Pair	Single Pair (20 AWG)	100	DXN2600	Shielded Twisted Pair
	Single Pair (22 AWG)	100	GSC-03-85203-VG	
	Single Pair (22 AWG)	100	DXN2601	CAN Bus
	Single Pair (24 AWG)	100	DXN2602	
	Single Pair (26 AWG)	100	DXN2603	
	Single Pair (28 AWG)	100	DXN2604	
	Single Pair (30 AWG)	100	DXN2605	
	Single Pair (32 AWG)	100	DXN2606	
CAN Bus	Single Pair (24 AWG)	120	GSC-03-84793-VG	Ethernet (4 Pairs)
	Single Pair (24 AWG)	120	GSC-03-85752-24D	
	Single Pair (26 AWG)	120	GSC-03-85752-26D	
Ethernet (Cat8)	4 Pairs (24 AWG)	100	RCN9235-24	Ethernet (2 Pairs)
	4 Pairs (26 AWG)	100	RCN9235-26	
Ethernet (Cat5e/6A)	4 Pairs (24 AWG)	100	GSC-01-85237-VG	Ethernet (Quadrx)
	4 Pairs (24 AWG)	100	RCN8966-24	
	4 Pairs (24 AWG)	100	RCN9034-24	
	4 Pairs (26 AWG)	100	RCN8966-26	
	4 Pairs (26 AWG)	100	RCN9047-26	
	4 Pairs (28 AWG)	100	RCN9034-28	
Ethernet (Cat5e)	2 Pairs (26 AWG)	100	RCN9133-26	Quad
Ethernet (Cat5e)	Quadrx (24 AWG)	100	GSC-03-84608-00	
	Quadrx (26 AWG)	100	GSC-03-84820-00	FireWire
Quad	Quadrx (24 AWG)	100	RCN8752	
	Quadrx (26 AWG)	100	RCN8982	
	Quadrx (28 AWG)	100	RCN8973	Fibre Channel
FireWire® (IEEE 1394b)	Quadrx (22 AWG)	110	RCN8645	
	Quadrx (24 AWG)	110	RCN8647	
	Quadrx (26 AWG)	110	RCN8652	USB
Fibre Channel	Quadrx (26 AWG)	150	RCN8328	
USB (2.0)	Data/Power (22 AWG)	90	RCN8800-22D-22P-H	
	Data (24 AWG)	90	RCN8800-24D-22P-H	
	Power (22 AWG)	90	RCN8800-24D-22P-H	
	Data (26 AWG)	90	RCN8800-26D-24P-H	
	Power (24 AWG)	90	RCN8800-26D-24P-H	


Gore's Standard Copper Cables (continued)

Cable Type/Protocol	Construction	Standard Impedance Ohms	Gore Part Number
USB (3.0)	Data (26 AWG) Power (22 AWG)	90	GSC-01-85201-VG
USB (3.1)	Data (26 AWG) Power (24 AWG)	90	GSC-03-84761-24D
HDMI (2.0)	Hybrid	100	RCN9121
DVI (Digital Only)	4 Pairs (24 AWG)	100	GSC-01-85249-24S
Coaxial	Single (22 AWG)	75	CXN3671
Coaxial	Single (26 AWG)	75	CXN3680

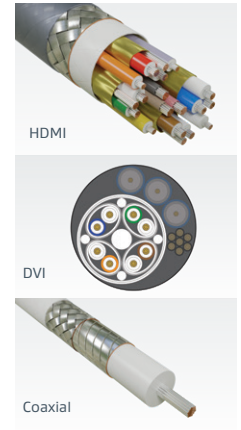


Gore's Standard Fiber Optic Cables

Cable Type/Protocol	Construction	Core/Cladding/Coating	Gore Part Number
Simplex	1.8 mm, OM1	62.5/125/245	GSC-13-84640-07
	1.8 mm, OM2	50/125/245	GSC-13-84639-07
	1.8 mm, OM3	50/125/245	GSC-13-84943-07
	1.8 mm, OM4	50/125/245	GSC-13-85423-07
Simplex	1.2 mm, OM2	50/125/250	FON1307
Simplex	900 micron, OM1	62.5/125/245	GSC-13-85067-00



Gore's Standard Tethered Drone Cables

Cable Type/Protocol	Construction	Operating Voltage Vrms	Core/Cladding/Coating	Gore Part Number
Power Pair	Single Pair (20 AWG)	600	—	RCN9188
Power Pair	Single Pair (24 AWG)	600	—	RCN9190
Hybrid	Power Pair: 16 AWG Fiber: 900 micron	—	8/125/245	RCN9164
Hybrid	Power Pair: 20 AWG Fiber: 900 micron	—	8/125/245	RCN9166
Hybrid	Power Pair: 24 AWG Fiber: 900 micron	—	8/125/245	RCN9168

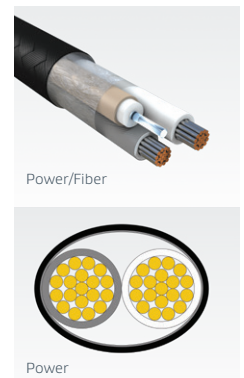

NOTICE — USE RESTRICTIONS APPLY. Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations.

FireWire is a registered trademark of Apple, Inc., in the U.S. and other countries.

GORE, *Together, improving life*, and designs are trademarks of W. L. Gore & Associates © 2025 W. L. Gore & Associates, Inc.

